

## Installation Steps:



- 1 Mount top and bottom of bracket to pole with metal bands. Secure metal bands with screw driver.



- 2 Install fiberglass arm and insert pin into nose and arm.



- 3 Insert zip tie through banner grommet and pin.



- 4 Clip excess ends of metal bands and zip ties.

The BannerSaver bracket is easy to install, move and adjust. These step by step instructions will provide the necessary information for any installer to install the perfect light pole banner program.

*It is highly recommended that you install the banner at the same time you install the brackets. Installing the brackets prior to installing the banner will likely result in necessary adjustments and incorrect measurements. We recommend a "top-to-bottom" approach.*

## Necessary Equipment

- |  |   |                 |
|--|---|-----------------|
| ✓ Two BannerSaver™ Brackets per banner | ✓ Zip Ties (two per banner)                   | ✓ Tin Snips     |
| ✓ Banding (three per bracket)          | ✓ Lift Truck                                  | ✓ Plastic Snips |
|  | ✓ Electric Screw Driver with 5/16" nut driver | ✓ Duct Tape     |


### Installing the Top Bracket

- Position and fully install top bracket
- Use three bands per bracket, six per set
- **Remember—top bracket, spring on top!**  
*(Duct tape is useful as a third-hand while you secure the banding.)*

### Install Top Edge of Banner

- Fiberglass arm needs to be 10 cm longer than banner width
- Insert arm through pole pocket and insert end with the metal sleeve into the nose of the bracket
- Insert Pin through nose and fiberglass arm
- Finish with zip tie through grommet
- Tighten banding and clip excess banding and zip tie

*(At this point the top bracket and the top of the banner will be fully installed.)*

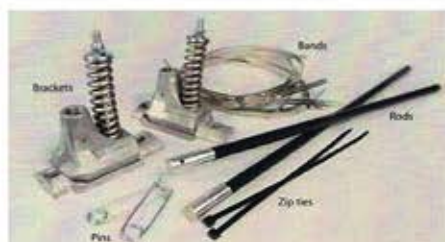

### Installing the Bottom Bracket

Move down the pole and install the bottom bracket and banner.

- Insert fiberglass arm through the pole pocket with the metal sleeve inserted into the nose of the bracket
- Insert the pin through nose and fiberglass arm
- Remember—bottom bracket, spring on bottom!

The banner is now fully extended and attached to the BannerSaver bracket. The BannerSaver bracket is now ready to be installed on the pole.

- Push bottom bracket against pole and install both top bands

Remember, BannerSaver brackets have a one degree cantilever so the bottom of the bracket will stick out one degree.

- Push bottom edge of bracket against pole and install bottom band
- Finish with zip tie through grommet and trim ends of the zip tie and banding