


NEVER FURL ® RAILMOUNT INSTRUCTIONS

The following instructions are supplied with the Never Furl[®] Rail Mount unit. This product is not designed to be affixed to upper story railings. We strongly recommend that all assembly be done on the inside of a ground floor railing to prevent injury to others.



When you first receive your Never Furl, Inc. Rail Mount this is the way it is assembled.




After removing the shrink wrap, loosen the screw indicated above and slide the top bracket up to clear area to remove knob.

U.S. Patent No. 6,276,651



NEVER FURL [®] RAILMOUNT INSTRUCTIONS (continued)

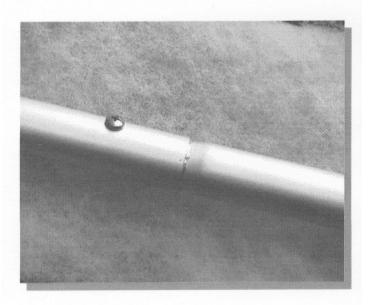

All two piece aluminum flagpole sets need to be secured with the sheet metal screw included to prevent separation of the sections as shown in the photo on the left.




To assure safety, see picture on left for approved method for ground floor installation of railing. Rest flag pole on shoulder. Before final tightening of black knob, swing unit over and in place.




NEVER FURL [®] RAILMOUNT INSTRUCTIONS

(continued)

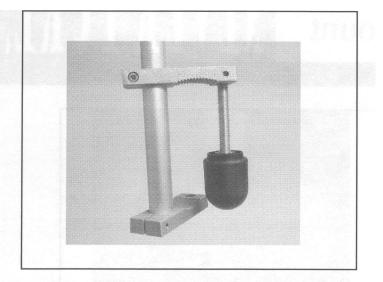

Remove the knob completely from the threaded rod.

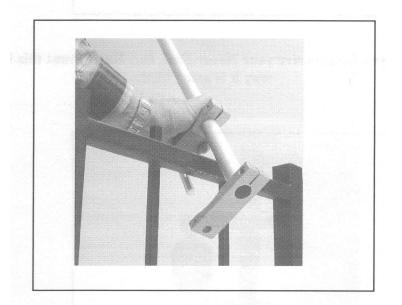


Insert rail mount straddling rail as shown2.




NEVER FURL [®] RAILMOUNT INSTRUCTIONS

(continued)



Insert threaded rod into bottom section of rail mount. Make sure that rail is between the two rail mounts and between flagpole and threaded rod.




Holding pole in place, install large black knob onto threaded rod. Tighten loosely making sure that pole is at desired angle.




NEVER FURL ® RAILMOUNT INSTRUCTIONS

(continued)

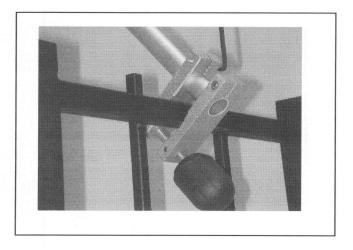

Before final tightening of knob, secure Allen screw as shown tightly.

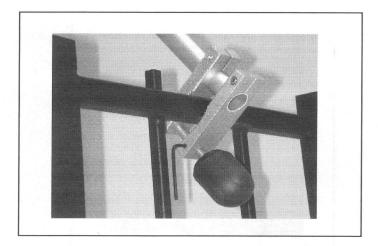

Tighten large black knob securely then tighten Allen screw as shown tightly to make sure thread does not loosen while in use. To remove flagpole reverse procedure.

www.neverfurl.com